


Relocate existing street nameplate and grit bin to new location behind new footway construction.

Tactile area to be 1.8 m x 0.8 m at each dropped crossing point.

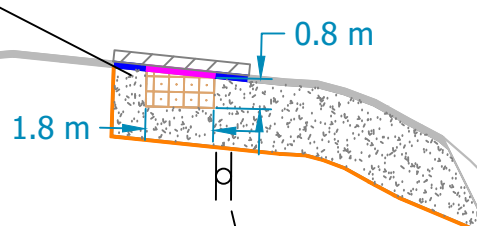

Relocate existing 20 zone signs to new location at end of new footway construction in grass verge.
Sign mounting height to bottom of sign is to be 2.1 m.

Notes

Road is a single carriageway with 20 mph.
Risk of striking underground services - see attached Public Utility plans.
HV Cable in area - indicatively drawn.
There may be other services present and the Contractor shall take appropriate measures to locate them.
Road is the only access road to Chapel Level Care Home.
Dropped crossings to be constructed to standard detail CS/SD11/37.

Key

- K3/1 kerb - Bullnose (flush) to standard detail CS/SD11/03.
- K5 kerb - Transition to standard detail CS/SD11/04.
- E1 kerb - Edging to standard detail CS/SD11/14.
- Existing kerbing.
- Footway Type F1 to standard detail CS/SD11/28A.
- Reinstatement adjacent kerbing Type A2.
- BUFF coloured BLISTER tactile paving to standard detail CS/SD1/33.

HV CABLE



REV	AMENDMENTS				BY	AP'D	DATE
Footway Works Broom Gardens, Kirkcaldy					 ROADS & TRANSPORTATION SERVICES		
SCALE	NTS	DRAWING No.	00422		HEAD OF SERVICE - JOHN MITCHELL		
DESIGNED	KJ	DRAWN	KJ	CHECKED	LC	APPROVED	LC
						DATE	AUGUST 2024